


GOVT.86 LOCATIONS -DOORS-ALL SERIES

MORTISE LOCK LOCATIONS FROM TOP TO LATCH CUTOUT

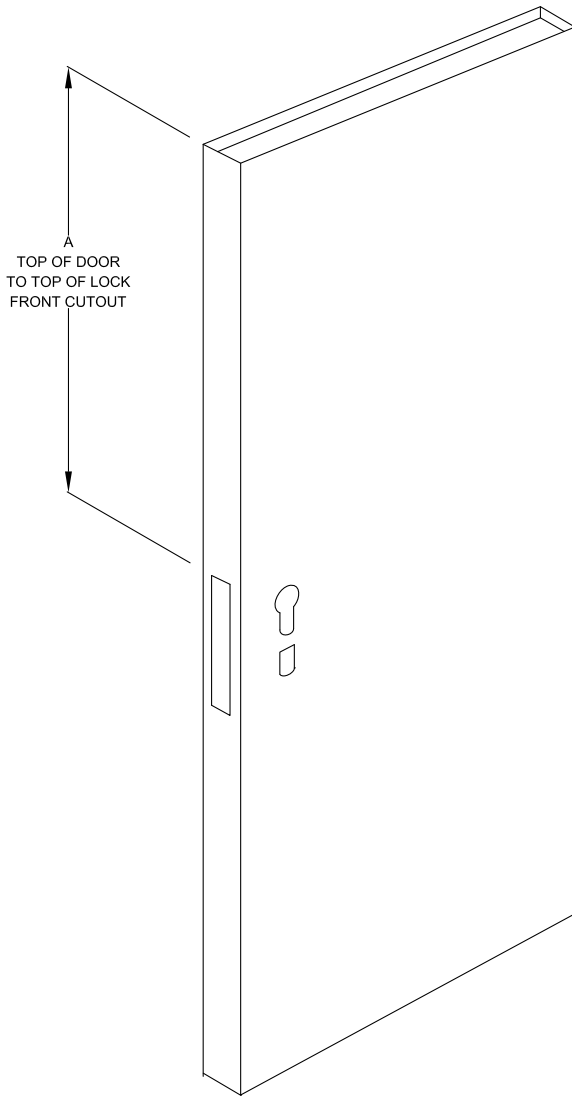

* LOCK LOCATION CONFORMS TO
STANDARD STRIKE LOCATION OF
38" \varnothing FROM BOTTOM OF FRAME.

NOMINAL DOOR OPENING HEIGHT	MORTISE LOCK GOV'T 86 ANSI A156.115
	A*
6' - 0"	30-1/4"
6' - 2"	32-1/4"
6' - 4"	34-1/4"
6' - 6"	36-1/4"
6' - 8"	38-1/4"
6' - 10"	40-1/4"
7' - 0"	42-1/4"
7' - 2"	44-1/4"
7' - 4"	46-1/4"
7' - 6"	48-1/4"
7' - 8"	50-1/4"
7' - 10"	52-1/4"
8' - 0"	54-1/4"
8' - 2"	56-1/4"
8' - 4"	58-1/4"
8' - 6"	60-1/4"
8' - 8"	62-1/4"
8' - 10"	64-1/4"
9' - 0"	66-1/4"
9' - 2"	68-1/4"
9' - 4"	70-1/4"
9' - 6"	72-1/4"
9' - 8"	74-1/4"
9' - 10"	76-1/4"
10' - 0"	78-1/4"
10' - 2"	80-1/4"
10' - 4"	82-1/4"
10' - 6"	84-1/4"
10' - 8"	86-1/4"
10' - 10"	88-1/4"
11' - 0"	90-1/4"
11' - 2"	92-1/4"
11' - 4"	94-1/4"
11' - 6"	96-1/4"
11' - 8"	98-1/4"
11' - 10"	100-1/4"
12' - 0"	102-1/4"